



CE RoHS


■ Feature特征

- Universal AC input/Full range
国际通用全范围交流输入
- Protections: Short circuit/Over load
短路保护, 过载保护
- Fan cooled采用风扇冷却
- Higt efficiency,long life and high reliability
高效率, 长寿命和高可靠性
- Using 105℃long life electrolytic capacitors
使用105度长寿命电容器
- 100% full load bure-in test 100%满载老化
- Installed with EMI filter, minimum wave
内装EMI滤波器, 极小纹波


Model型号	S-800-12	S-800-15	S-800-24	S-800-36	S-800-48
Specification性能					
Dc voltage 直流电压	12V	15V	24V	36V	48V
Rated current 额定电流	58A	53A	33A	22A	16.6A
Current range 电流范围	0-58A	0-53A	0-33A	0-22A	0-16.6A
Rated power 额定功率	700W	800W	800W	800W	800W
Ripple & noise 纹波和噪音	Note:1 150mVp-p	150mVp-p	150mVp-p	200mVp-p	240mVp-p
Voltage ADJ. range 电压调整范围	10%	10%	10%	10%	10%
Voltage tolerance 电压精度	Note:2 ±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
Line regulation 线性调整率	Note:3 ±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
Load regulation 负载调整率	Note:4 ±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
Setup, rise, hold up time 启动, 上升, 保持时间	500ms,50ms,60ms/230VAC				
Input voltage range 输入电压范围	85-132VAC/170-264VAC,47-63HZ,Selected by switch由开关选择				
Efficiency 效率	74%	78%	82%	82%	83%
Input current 输入电流	7A/115V 4A/230V				
Inrush current 浪涌电流	Cold start冷启动：65A/230V				
Leakage current 漏电流	<4mA / 240VAC				
Overload protection 过载保护	105%-150%Rated output power; Type:Hiccup; Reset:auto recovery 105%-150%额定输出的功率；模式：打嗝模式；复位：自动恢复				
Working temp humidity 工作温度, 湿度	-25～+70℃, 20 ~ 90% RH				
Storage temp humidity 储存温度, 湿度	-40～+85℃, 10 ~ 95% RH				
Temp coefficient 温度系数	±0.03%/°C (0 ~ 50°C) (+5V)				
Vibration 耐振动	10 ~500Hz, 2G 10min/cycle周期, X、Y、Z Each axes轴各60min				
Withstand voltage 耐压性	I/P-O/P:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC				
Isolation resistance 隔离电阻	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH				
Safety standards 安全标准	Design refer to UL1950 设计交付UL1950				
EMC standards EMC标准	Meet FCC part 15J condition class A 满足FCC部分15J条件，等级A				
Overall dimension 外形尺寸	240x125x64mm				
Weight 重量	1.3Kg				
Note:1.Ripple & noise are measured at 20MHZ of bandwidth by using 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor; 纹波和噪声测量方法：20HZ带宽下测量，A12双绞线，终端并0.1uF&47uF的电容器； Note:2.Tolerance:includes set up tolerance, line regulation and load regulation; 精度：包括设定误差，线性调整率，负载调整率； Note:3.Line regulation is measured from low line to hige line at rated load; 线性调整率测量方法：在额定负载下，从低电压到高压测试； Note:4.Load regulation is measured from 0% to 100% rated load. 负载调整率测量方法：负载从0%到100%					

■ Mechanical Specification 结构尺寸


Unit 单位: mm

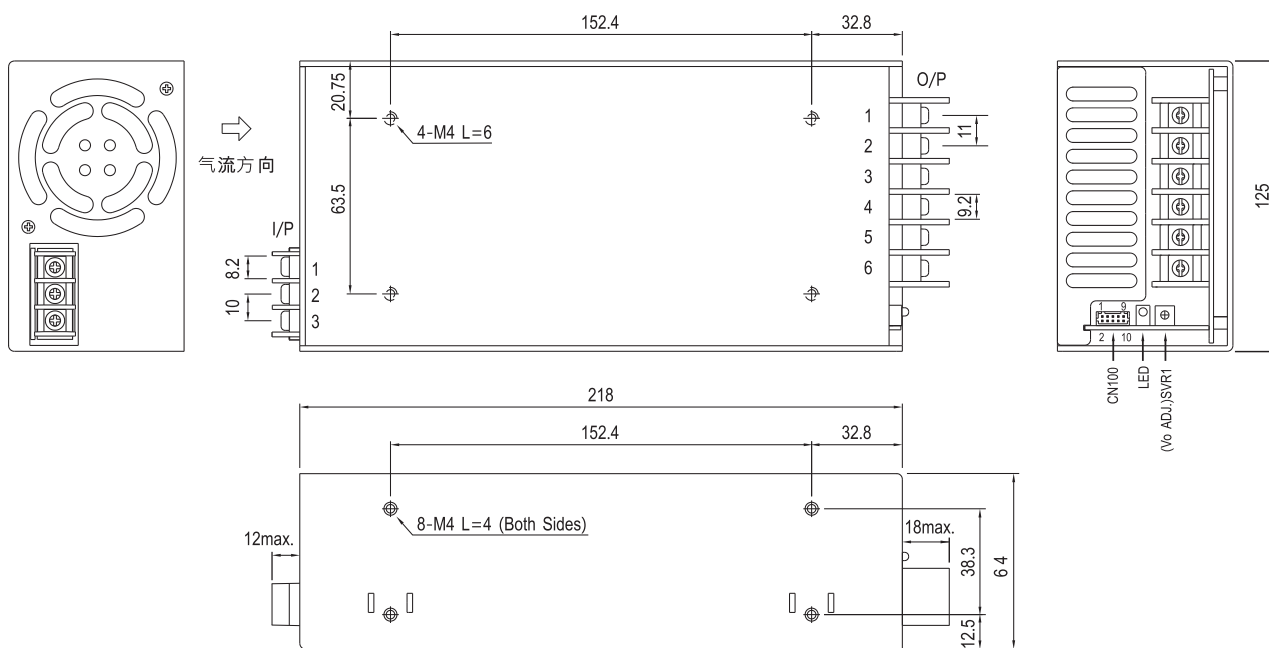

■ Derating Curve 降额曲线

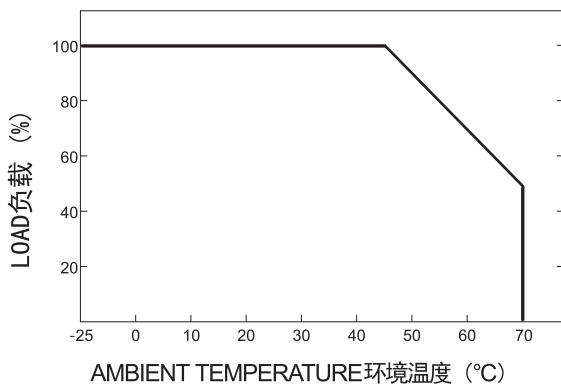

■ Output Derating VS Input Voltage 静态特性曲线

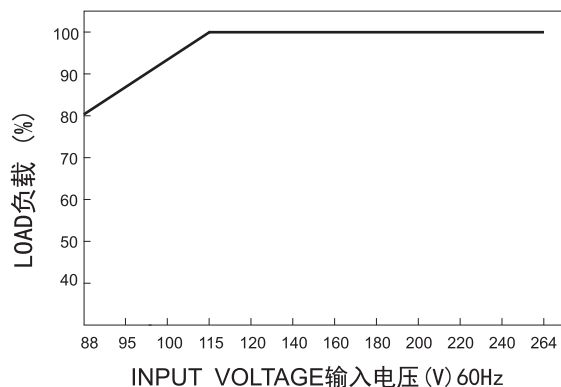

浙江欧迪龙电子科技有限公司
Zhejiang Aotoro Electronic Technology CO.,LTD

ADD: Liuhuang Road 2188#, Liushi town, Yueqing city, Zhejiang province, PRC 325604
浙江省乐清市柳市镇柳黄路2188号

TEL: 86-577-61758688 FAX: 86-577-62757002
Http://www.aotoro.com E-mail: aotoro@aotoro.com